




for microelectronic rework

## CONFIGURATION & FEATURES

### HGRS-IV-P HOT Gas Workstation

© Midas Technology 1995

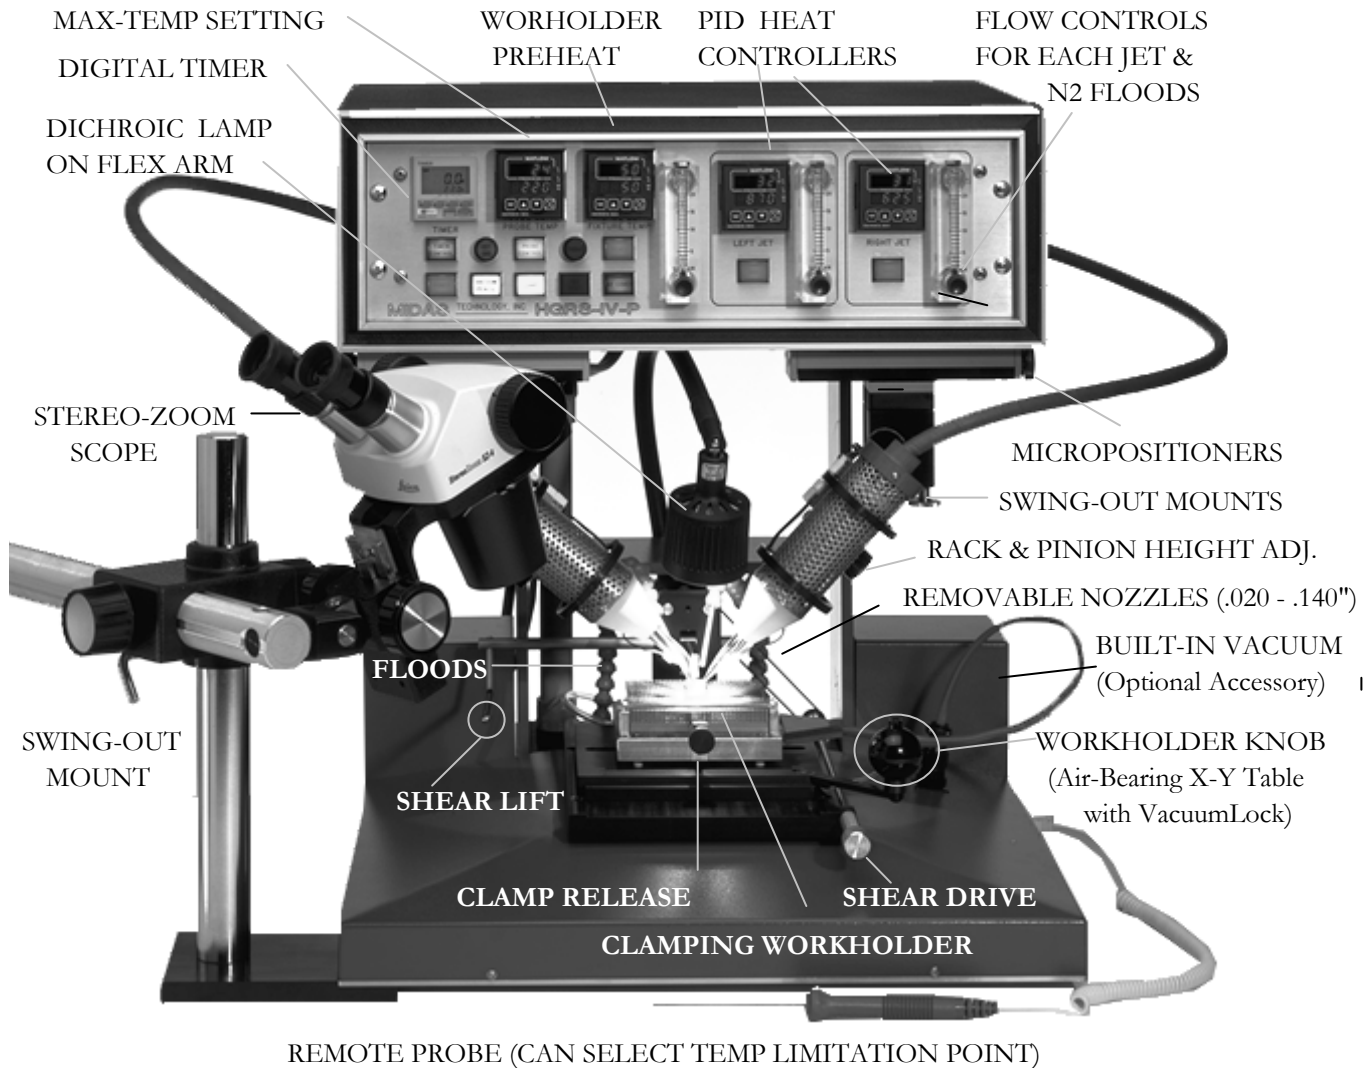

#### SOME ADDITIONAL FEATURES (NOT EASILY VISIBLE ABOVE)

- Quick-release, "universal" wedge & backstop clamping system for easy setup of packages and substrates.
- Standard Workholder has 3"x3" travel, the optional large workholder moves 6"x6".
- Limiting vacuum applied to workholder lock provides "fail-safe" against cold-shear damage.
- Variety of easily changed shear tools (flat-front & wedge styles from .020" - .200" widths)
- Angled nozzles (shown on left), and straight (on right) available in round or shaped orifice styles.
- Vacuum pencil (standard) plus Vacuum Pickup Head (in vac.package) for eutectic die removal.
- Fully illustrated operation manual is standard.
- On-Site installation and operator training is available.